

Kelin Epoxy 係一種高品質之環氧樹脂，其特點是堅固耐用、抗化學腐蝕、易於清潔。Epoxy 係一種由環氧樹脂及固化劑所組成之混合物，其特點是堅固耐用、抗化學腐蝕、易於清潔。Subbase Epoxy Resin 係一種高品質之環氧樹脂，其特點是堅固耐用、抗化學腐蝕、易於清潔。cloud 係一種高品質之環氧樹脂，其特點是堅固耐用、抗化學腐蝕、易於清潔。

此種材料之優點在於其堅固耐用、抗化學腐蝕、易於清潔。其應用範圍廣泛，包括浴室、廚房、客廳、辦公室等。其特點是堅固耐用、抗化學腐蝕、易於清潔。



此種材料之優點在於其堅固耐用、抗化學腐蝕、易於清潔。

Gray 1#

Gray 2#

Gray 3#

Gray 4#

Gray 5#

Gray 6#

Gray 7#

Gray 8#

Gray 9#

Cement Gray

Dull Gray

Silver Gray

Metal Gray

Luxury Silver

Glacier White

Calaeatta

Pearl Gold

Slate Gray

Terra Brown

Greyish Green

Yellow Gray

Soft Khaki

Yellowish Brown

Olive Brown

Brownness

Dark Brown

Reddish Brown

Rock Bslack



□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□





Clean the tiles and keep it dry



Polish with tile wax except the glazed tile




Open & Watch, both sides can extruded meanwhile



Screw on the nozzle, put on the grout gun




Inclined cut the top of the nozzle in 45°



Squeeze out 60-80cm long grout in the forepart



Evenly squeeze out the tile agent along the gap



Press the grout with professional glue-press tools



Don't touch in 4-5 hours and remove excess grout then.




Keep the tiles dry in 24 hours

□□□□□□□□□□□□□□□□□□□□□□□□□□



Two Component Caulking Gun

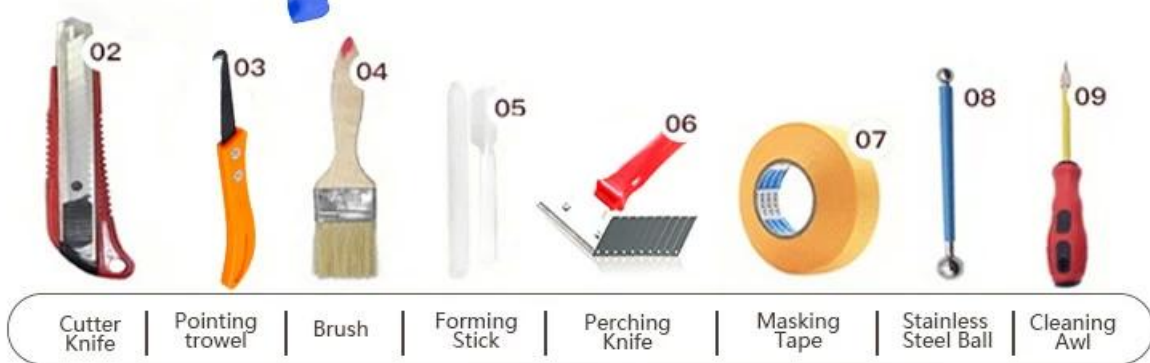

□□□□□□□□□□ □□□□□□



□□□□□□□□□□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□□□□□□□

