


Kelin Epoxy 係一種高品質之環氧樹脂，其特點是堅固耐用、抗化學腐蝕、易於清潔。Epoxy 係一種由環氧樹脂及固化劑所組成之混合物，當其混合後，會產生化學反應，形成一種堅硬之固體。Subbase Epoxy Resin 係一種專為地盤工程而設計之環氧樹脂，其特點是粘結力強、收縮率低、且能填補地盤之空隙。clund 係一種專為地盤工程而設計之環氧樹脂，其特點是粘結力強、收縮率低、且能填補地盤之空隙。

此種材料之優點在於其堅固耐用、抗化學腐蝕、易於清潔。其缺點在於其價格較高、且施工時需小心操作。此種材料之優點在於其堅固耐用、抗化學腐蝕、易於清潔。其缺點在於其價格較高、且施工時需小心操作。



此種材料之優點在於其堅固耐用、抗化學腐蝕、易於清潔。其缺點在於其價格較高、且施工時需小心操作。

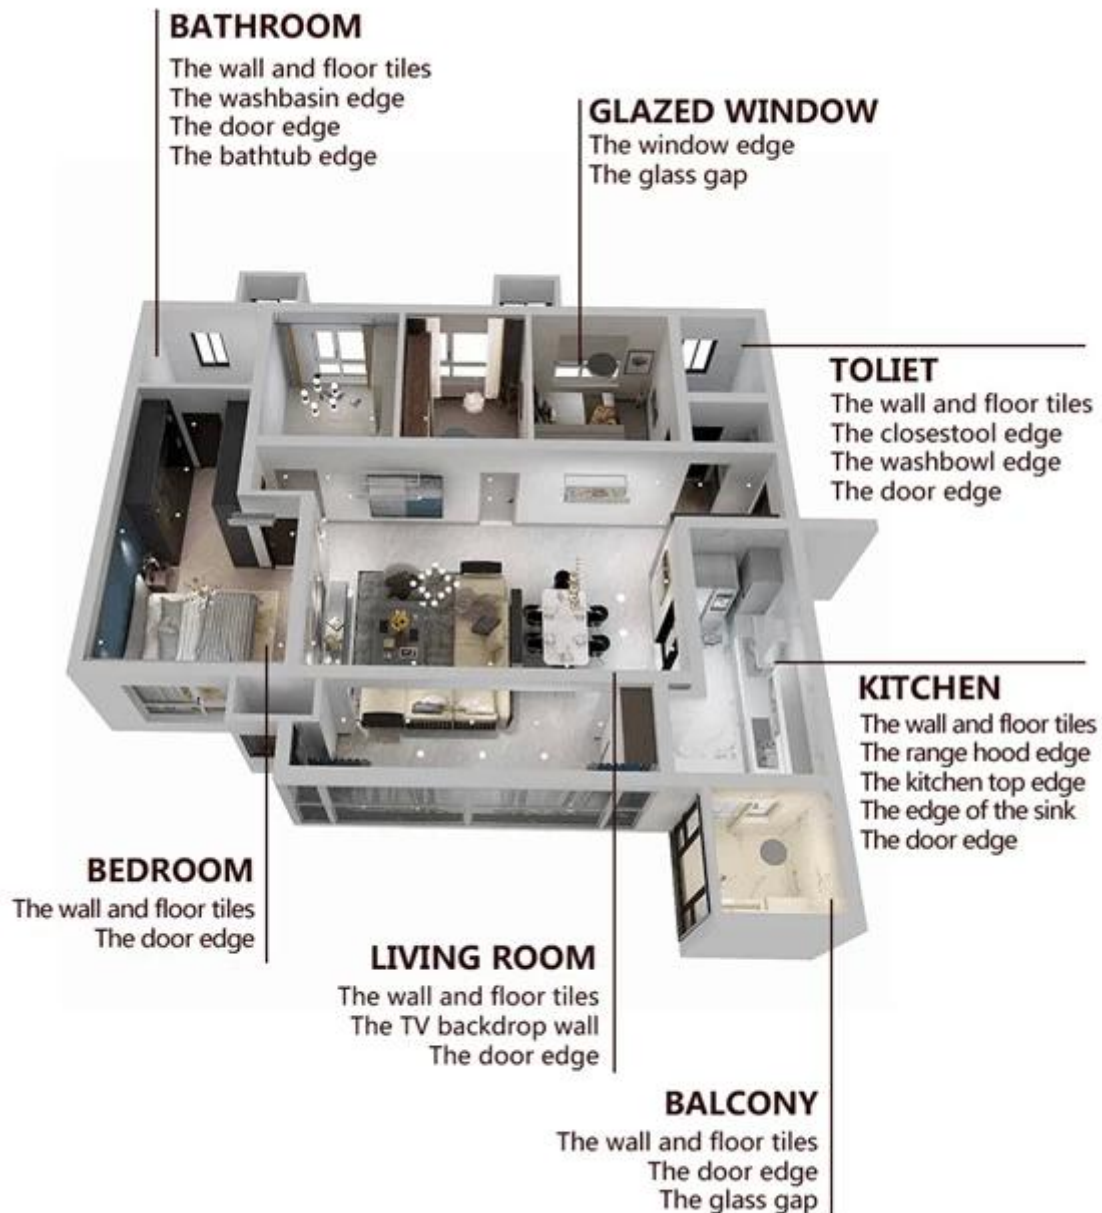



01
Clean the tiles and keep it dry



02
Polish with tile wax except the glazed tile



03
Open & Watch, both sides can extruded meanwhile



04
Screw on the nozzle, put on the grout gun



05
Inclined cut the top of the nozzle in 45°



06
Squeeze out 60-80cm long grout in the forepart



07
Evenly squeeze out the tile agent along the gap



08
Press the grout with professional glue-press tools




09
Don't touch in 4-5 hours and remove excess grout then.



10
Keep the tiles dry in 24 hours



Two Component Caulking Gun



Cutter Knife

Pointing trowel

Brush

Forming Stick

Perching Knife

Masking Tape

Stainless Steel Ball

Cleaning Awl





□□□□□□□□□□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□□□□□□□

