


Kelin Epoxy 係一種高品質之環氧樹脂，其特點是堅固耐用、抗化學腐蝕、易於施工。Epoxy 係一種由環氧樹脂及固化劑組成之混合物，經混合後可形成堅硬之塗層。Subbase Epoxy Resin 係一種專為地盤處理而設計之環氧樹脂，其特點是粘結力強、滲透力強，可填補地盤之空隙及提高地盤之強度。clund 係一種專為地盤處理而設計之環氧樹脂，其特點是粘結力強、滲透力強，可填補地盤之空隙及提高地盤之強度。

此種環氧樹脂之應用範圍極廣，包括地盤處理、牆面修補、浴室修補等。其優點包括：堅固耐用、抗化學腐蝕、易於施工、美觀大方。此種環氧樹脂之應用範圍極廣，包括地盤處理、牆面修補、浴室修補等。其優點包括：堅固耐用、抗化學腐蝕、易於施工、美觀大方。



此種環氧樹脂之應用範圍極廣，包括地盤處理、牆面修補、浴室修補等。其優點包括：堅固耐用、抗化學腐蝕、易於施工、美觀大方。



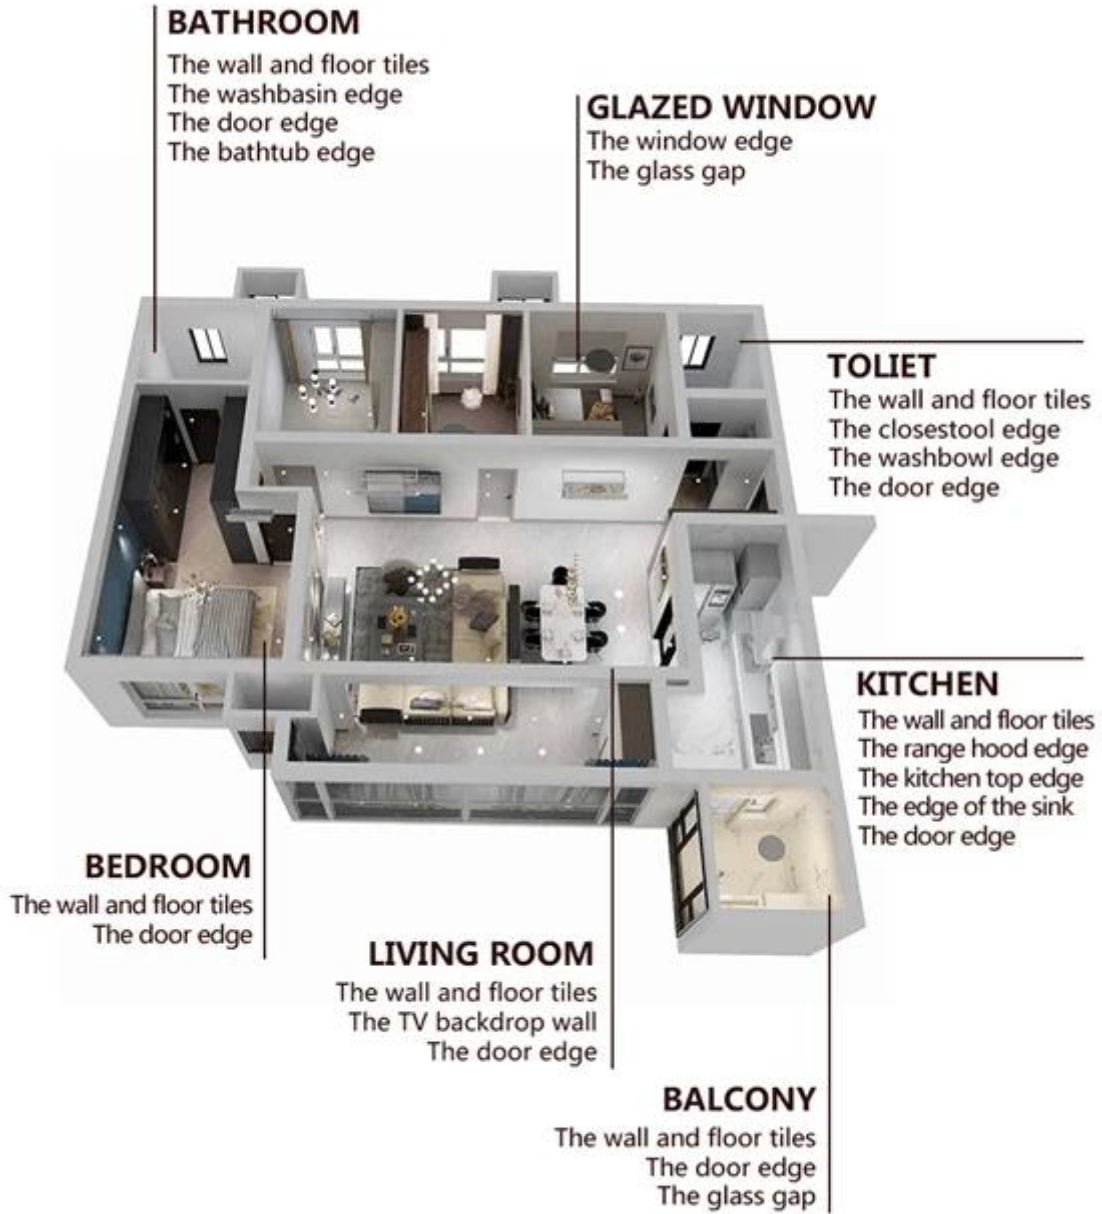

□□□□□□□□□□□□□□□□□□□□□□□□ □



01

Clean the tiles and keep it dry



02

Polish with tile wax except the glazed tile



03

Open & Watch, both sides can extruded meanwhile



04

Screw on the nozzle, put on the grout gun




05

Inclined cut the top of the nozzle in 45°




06

Squeeze out 60-80cm long grout in the forepart



07

Evenly squeeze out the tile agent along the gap



08

Press the grout with professional glue-press tools




09

Don't touch in 4-5 hours and remove excess grout then.



10

Keep the tiles dry in 24 hours



Two Component Caulking Gun



02

Cutter Knife



03

Pointing trowel



04

Brush



05

Forming Stick



06

Perching Knife



07

Masking Tape



08

Stainless Steel Ball



09

Cleaning Awl





□□□□□□□□□□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□□□□□□□

