


Kelin Epoxy 係一種高強度、高耐久之環氧樹脂，廣泛應用於建築、工業及交通運輸等領域。其特點包括：  
 1. 高強度：具有優異的機械性能，能承受重載及衝擊。  
 2. 高耐久：抗老化、抗腐蝕，使用寿命长。  
 3. 易施工：可現場澆築，固化快，施工簡便。  
 4. 環保無塵：施工過程中無塵、無毒，符合環保要求。  
 5. 粘接力強：能牢固粘結各種基材，如混凝土、金屬等。  
 Subbase Epoxy Resin 係一種專為基層處理而設計之環氧樹脂，其主要特點如下：  
 1. 增強基層強度：提高基層之承載能力，防止下陷。  
 2. 防水防潮：能有效防止水分滲透，保護基層結構。  
 3. 抗裂性能：能減少基層因乾縮而產生之裂縫。  
 4. 易於修補：能填補基層之缺陷，恢復其完整性。  
 5. 經濟實惠：相比傳統材料，具有更優之性價比。

此類材料之應用範圍極廣，包括：  
 - 室內外鋪地：如大堂、走廊、停車場等。  
 - 工業廠房：如車間、倉庫等。  
 - 交通設施：如機場、港口、碼頭等。  
 - 建築裝飾：如牆面、天花板等。  
 - 特殊環境：如海洋工程、化工廠等。  
 其優點在於：  
 - 施工簡便，工期短。  
 - 維護容易，清潔方便。  
 - 性能穩定，安全可靠。  
 - 環保健康，無異味。



此類材料之應用範圍極廣，包括：



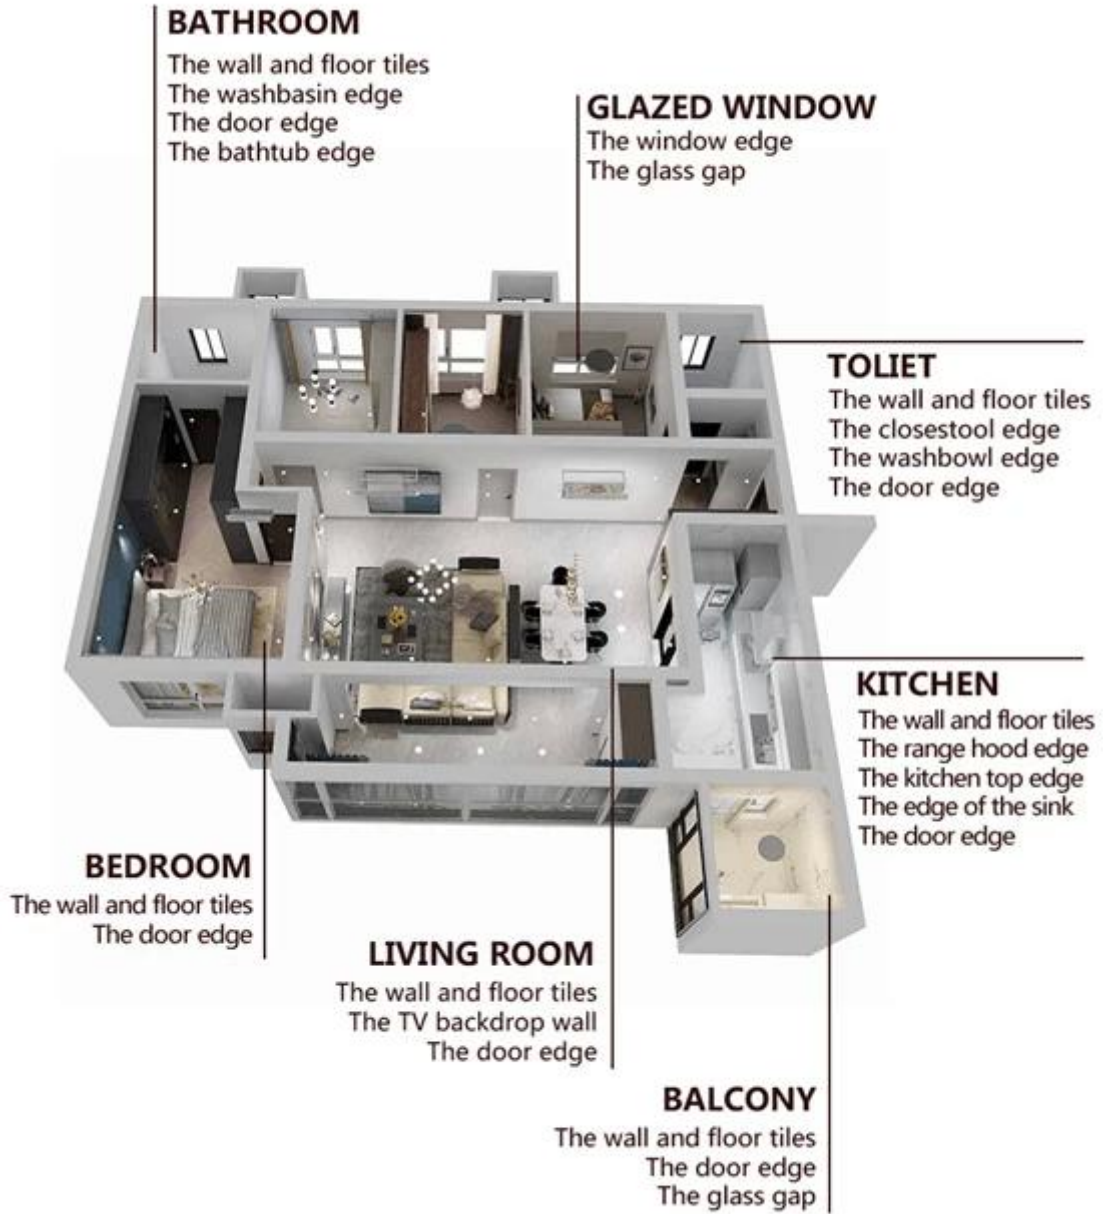

□□□□□□□□□□□□□□□□□□□□□□ □



01  
Clean the tiles and keep it dry



02  
Polish with tile wax except the glazed tile



03  
Open & Watch, both sides can extruded meanwhile



04  
Screw on the nozzle, put on the grout gun



05  
Inclined cut the top of the nozzle in 45°



06  
Squeeze out 60-80cm long grout in the forepart



07  
Evenly squeeze out the tile agent along the gap



08  
Press the grout with professional glue-press tools



09  
Don't touch in 4-5 hours and remove excess grout then.




10  
Keep the tiles dry in 24 hours

□□□□□□□□□□□□□□□□□□□□□□□□



Two Component Caulking Gun

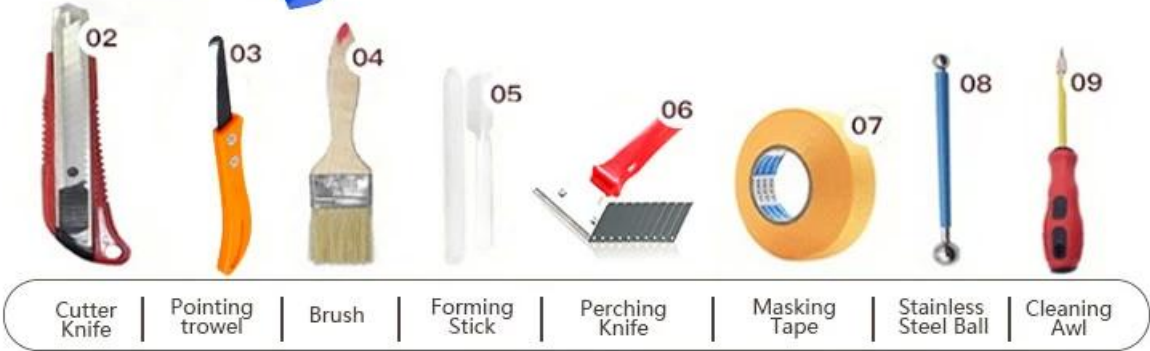

□□□□□□



□□□□□□□□□□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□□□□□□□

