

Kelin Epoxy 係一種高品質之環氧樹脂，其特點是堅固耐用、抗化學腐蝕、易於清潔。Epoxy 係一種由環氧樹脂及固化劑組成之混合物，經混合後可形成堅硬之塗層。Subbase Epoxy Resin 係一種專為地盤處理而設計之環氧樹脂，其特點是粘合力強、滲透力強，可填補地盤之空隙及提高地盤之強度。clund 係一種專為地盤處理而設計之環氧樹脂，其特點是粘合力強、滲透力強，可填補地盤之空隙及提高地盤之強度。

此種環氧樹脂之應用範圍非常廣泛，包括地盤處理、牆面處理、浴室處理等。其優點包括：堅固耐用、抗化學腐蝕、易於清潔、無塵、無毒、無臭。此種環氧樹脂之應用範圍非常廣泛，包括地盤處理、牆面處理、浴室處理等。其優點包括：堅固耐用、抗化學腐蝕、易於清潔、無塵、無毒、無臭。



此種環氧樹脂之應用範圍非常廣泛，包括地盤處理、牆面處理、浴室處理等。其優點包括：堅固耐用、抗化學腐蝕、易於清潔、無塵、無毒、無臭。







01 Clean the tiles and keep it dry



02 Polish with tile wax except the glazed tile



03 Open & Watch, both sides can extruded meanwhile



04 Screw on the nozzle, put on the grout gun



05 Inclined cut the top of the nozzle in 45°



06 Squeeze out 60-80cm long grout in the forepart



07 Evenly squeeze out the tile agent along the gap



08 Press the grout with professional glue-press tools



09 Don't touch in 4-5 hours and remove excess grout then.




10 Keep the tiles dry in 24 hours

□□□□□□□□□□□□□□□□□□□□□□



Two Component Caulking Gun

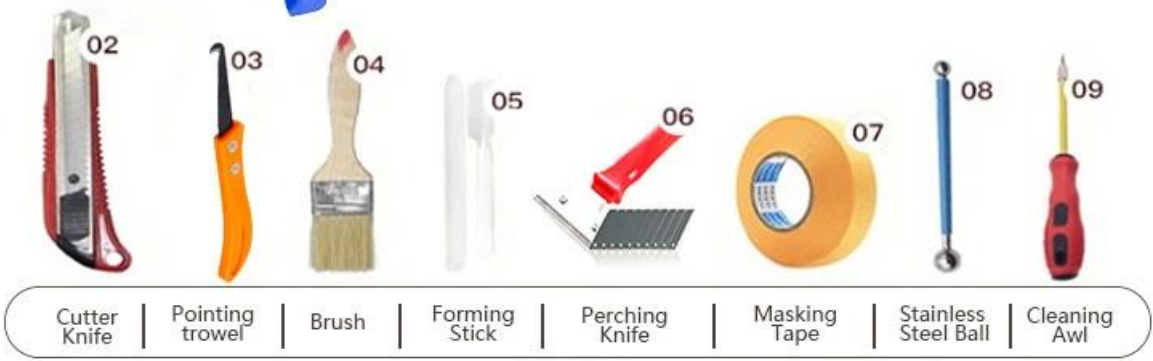

02 Cutter | 03 Pointing trowel | 04 Brush | 05 Forming Stick | 06 Perching Knife | 07 Masking Tape | 08 Stainless Steel Ball | 09 Cleaning Awl

□□□□□□□□□□ □□□□□□



□□□□□□□□□□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□□□□□□□

