


中国科学院陶瓷研究所与Kelin公司合作，共同研究开发了具有自主知识产权的高强、高韧、高耐候、高装饰性的新型陶瓷基复合材料。该材料具有良好的物理力学性能，广泛应用于建筑装饰、家居装饰、园林景观等领域。Kelin公司与中国科学院陶瓷研究所紧密合作，共同推动新材料在国内外市场的应用和发展。



中国科学院陶瓷研究所与Kelin公司合作，共同研究开发了具有自主知识产权的高强、高韧、高耐候、高装饰性的新型陶瓷基复合材料。

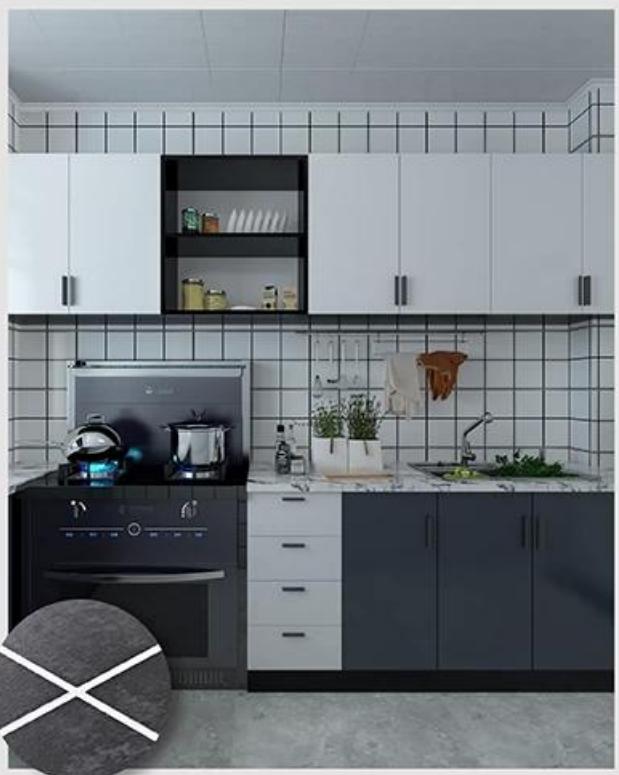

厨房瓷砖颜色选择指南



BATHROOM

The wall and floor tiles
The washbasin edge
The door edge
The bathtub edge

GLAZED WINDOW

The window edge
The glass gap

TOLIET

The wall and floor tiles
The closestool edge
The washbowl edge
The door edge

KITCHEN

The wall and floor tiles
The range hood edge
The kitchen top edge
The edge of the sink
The door edge

BEDROOM

The wall and floor tiles
The door edge

LIVING ROOM

The wall and floor tiles
The TV backdrop wall
The door edge

BALCONY

The wall and floor tiles
The door edge
The glass gap

A decorative horizontal bar consisting of a series of small, evenly spaced rectangles.



Clean the tiles and
keep it dry



Polish with tile wax
except the glazed
tile



Open & Watch, both
sides can extruded
meanwhile



Screw on the nozzle,
put on the grout
gun




Inclined cut the top
of the nozzle in 45°



Squeeze out
60-80cm long grout
in the forepart



Evenly squeeze out
the tile agent along
the gap



Press the grout with
professional
glue-press tools



Don't touch in 4-5
hours and remove
excess grout then.



Keep the tiles dry in
24 hours

oooooooooooooooooooo



Two Component Caulking Gun



Cutter
Knife



Pointing
trowel



Brush



Forming
Stick



Perching
Knife



Masking
Tape




Stainless
Steel Ball



Cleaning
Awl

oooooooooooo

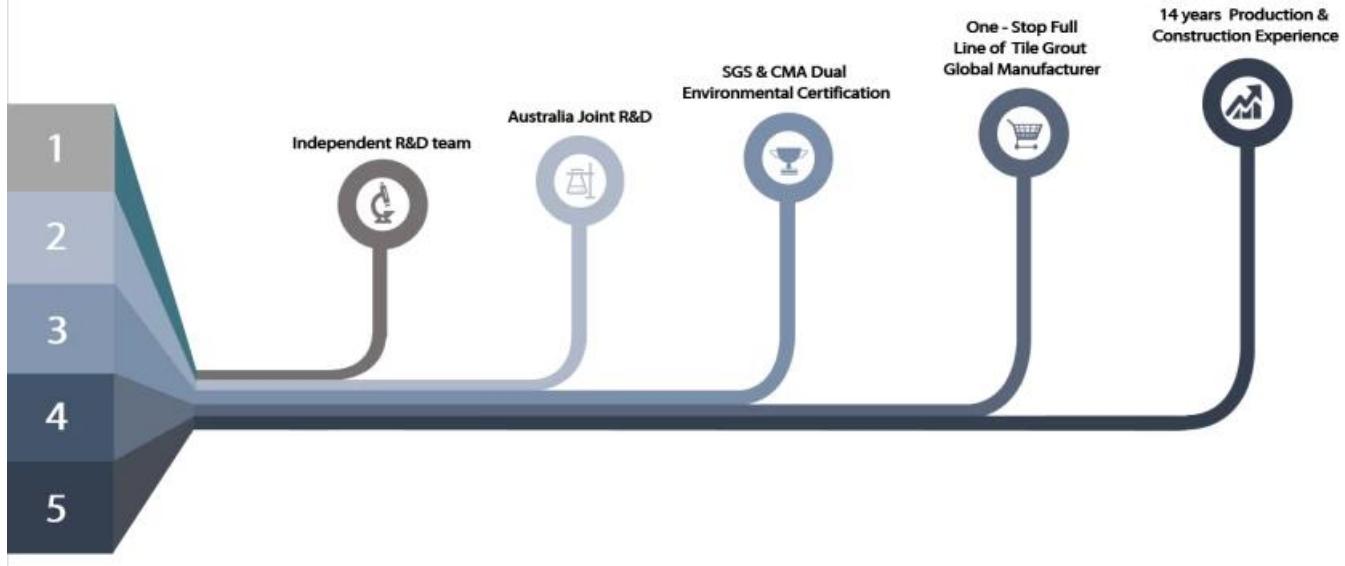

· · · · ·



· · · · ·

