


Kelin Epoxy 係一種高品質之環氧樹脂，其特點是堅固耐用、抗污、易於清潔。Epoxy 係一種由樹脂及硬化劑組成之混合物，經混合後會產生化學反應，使混合物變為堅硬之固體。Subbase Epoxy Resin 係一種專為地盤工程而設計之環氧樹脂，其特點是粘合力強、耐壓、抗裂。clund 係一種專為浴室及廚房而設計之環氧樹脂，其特點是防水、防霉、易於清潔。kelin 係一種專為浴室及廚房而設計之環氧樹脂，其特點是防水、防霉、易於清潔。



係一種高品質之環氧樹脂 係一種專為浴室及廚房而設計之環氧樹脂



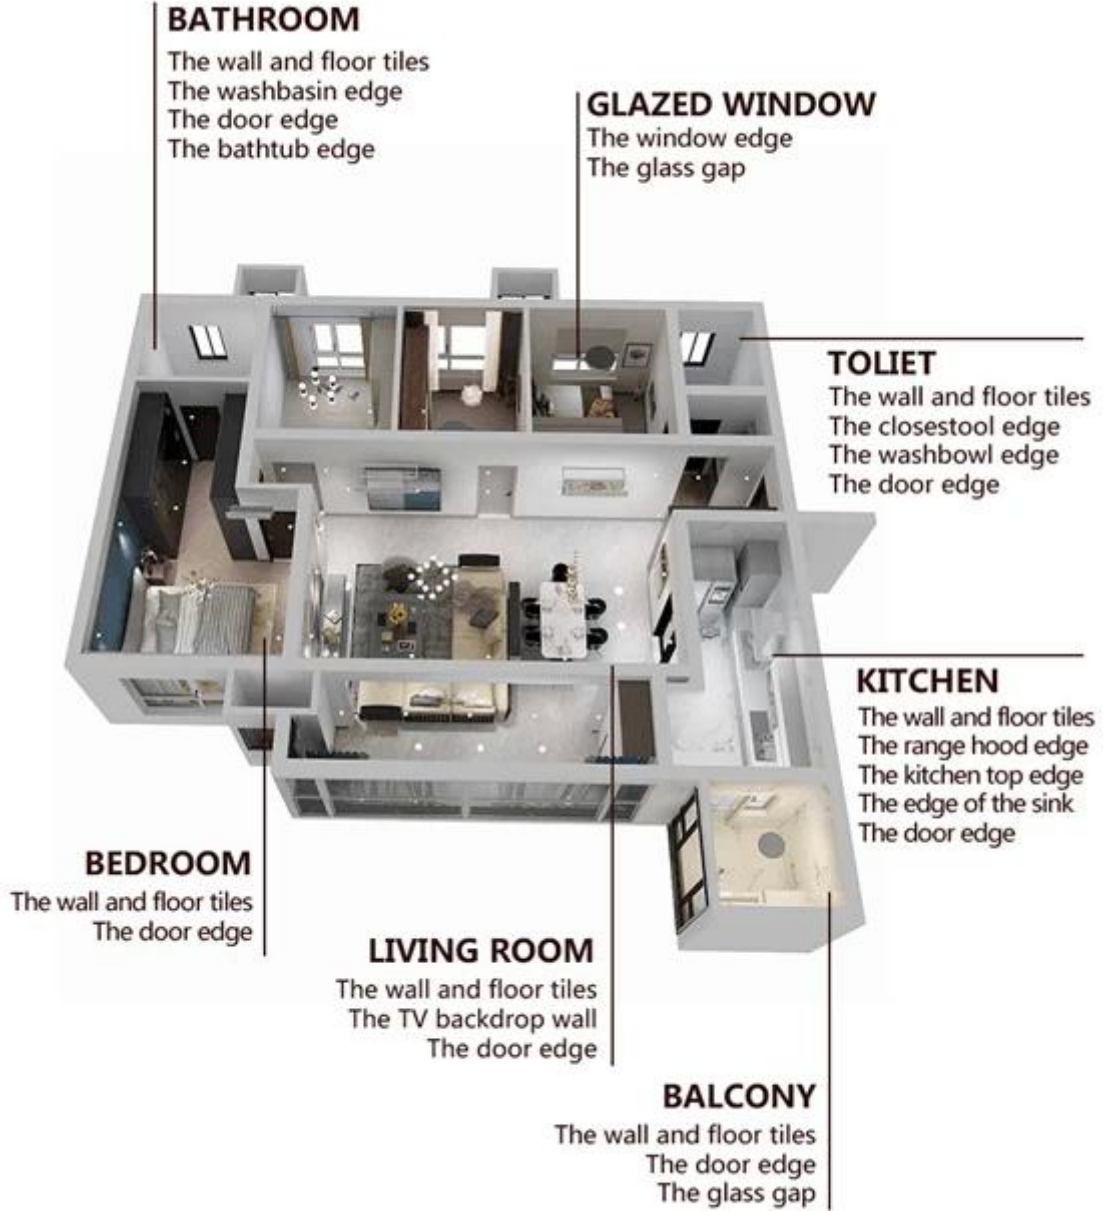

□□□□□□□□□□□□□□□□□□□□ □



01

Clean the tiles and keep it dry



02

Polish with tile wax except the glazed tile



03

Open & Watch, both sides can extruded meanwhile



04

Screw on the nozzle, put on the grout gun




05

Inclined cut the top of the nozzle in 45°



06

Squeeze out 60-80cm long grout in the forepart



07

Evenly squeeze out the tile agent along the gap



08

Press the grout with professional glue-press tools



09

Don't touch in 4-5 hours and remove excess grout then.




10

Keep the tiles dry in 24 hours


□□□□□□□□□□□□□□□□□□□□□□□□□□



Two Component Caulking Gun

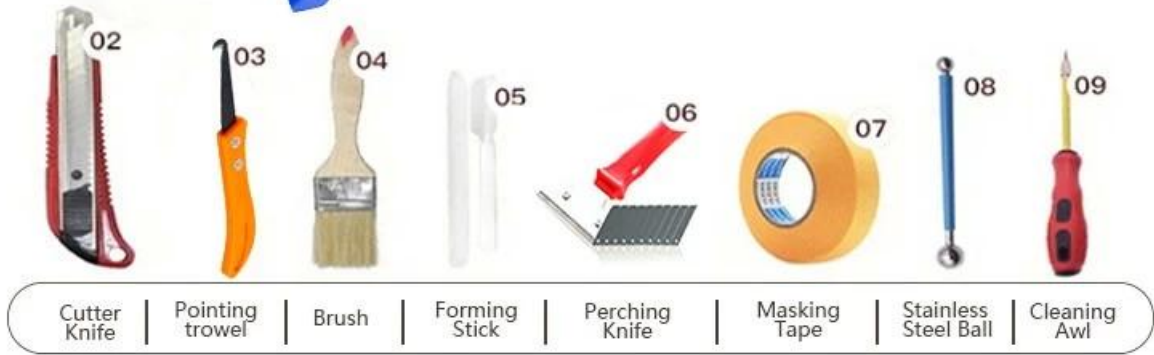

□□□□□□□□□□ □□□□□□

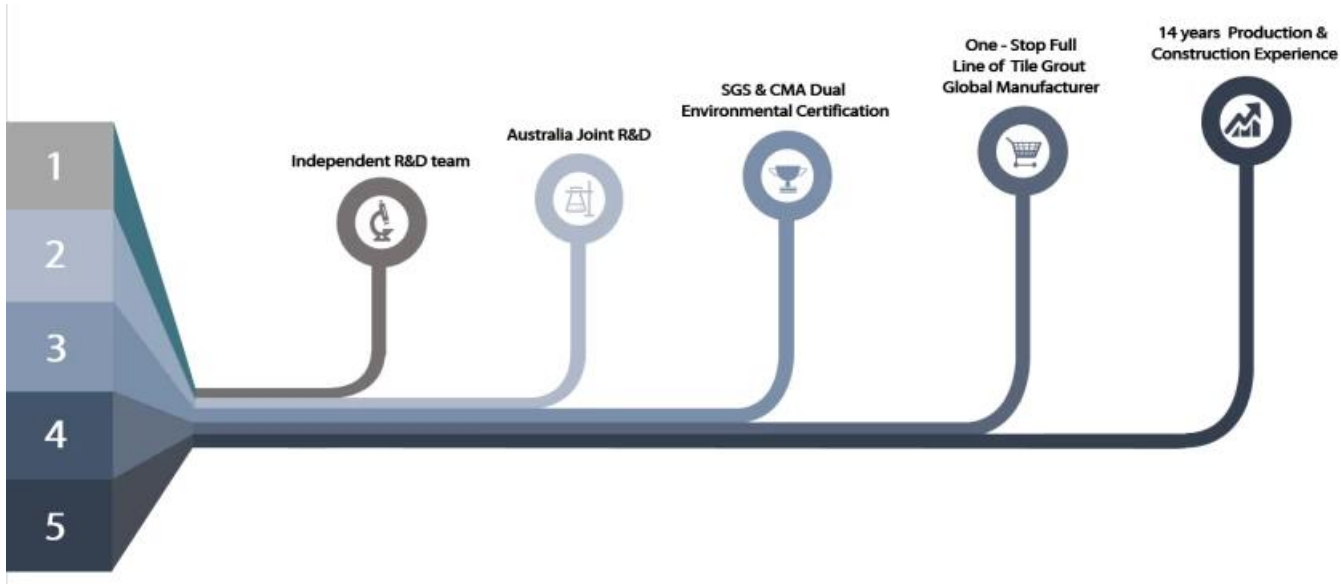

□□□□□□□□□□



□□□□□□□□□□



□□□□□□□□□□



□□□□□□□□□□



□□□□□□□□□□□□□□□□



□□□□□□□□□□



□□□□□□□□□□□□□□



□□□□□□□□□□



□□□□□□□□□□

□□□□□□□□□□

