


Kelin Epoxy 係一種高強度、高耐久之環氧樹脂，廣泛應用於建築、工業及交通等領域。其特點包括：
 1. 高強度：具有極高的抗壓及抗拉強度，能承載重負荷。
 2. 高耐久：具有優異的耐化學腐蝕、耐老化及耐磨性能。
 3. 易於施工：可與多種基材（如混凝土、金屬、木材等）良好粘結。
 4. 環保無毒：不含揮發性有機物（VOC），施工過程無異味。
 5. 美觀大方：可調製成多種顏色及光澤度，提升裝飾效果。
 Subbase Epoxy Resin 係一種專為地盤處理而設計之環氧樹脂，其主要特點如下：
 1. 增強地盤強度：能顯著提高地盤之承載能力，防止沉降。
 2. 防止水分滲透：具有極低之吸水率，能有效阻隔水分。
 3. 減少塵土揚起：能封鎖地盤表面之微孔，減少灰塵。
 4. 易於清潔：表面光滑且致密，方便日常清潔與維護。
 5. 延長地盤壽命：能保護地盤免受環境因素之破壞，延長使用壽命。


此類環氧樹脂產品，廣泛應用於建築、工業及交通等領域。其特點包括：
 1. 高強度：具有極高的抗壓及抗拉強度，能承載重負荷。
 2. 高耐久：具有優異的耐化學腐蝕、耐老化及耐磨性能。
 3. 易於施工：可與多種基材（如混凝土、金屬、木材等）良好粘結。
 4. 環保無毒：不含揮發性有機物（VOC），施工過程無異味。
 5. 美觀大方：可調製成多種顏色及光澤度，提升裝飾效果。
 6. 廣泛應用：適用於地盤處理、牆面修補、樓梯扶手、廚房台面、浴室邊緣、瓷磚美縫、陶瓷磚、瓷磚美縫、瓷磚美縫等。



此類環氧樹脂產品，廣泛應用於建築、工業及交通等領域。

-  Gray 1#
-  Gray 2#
-  Gray 3#
-  Gray 4#
-  Gray 5#
-  Gray 6#
-  Gray 7#
-  Gray 8#
-  Gray 9#
-  Cement Gray
-  Dull Gray
-  Silver Gray
-  Metal Gray
-  Luxury Silver
-  Glacier White
-  Calaeatta
-  Pearl Gold
-  Slate Gray
-  Terra Brown
-  Greyish Green
-  Yellow Gray
-  Soft Khaki
-  Yellowish Brown
-  Olive Brown
-  Brownness
-  Dark Brown
-  Reddish Brown
-  Rock Bslack



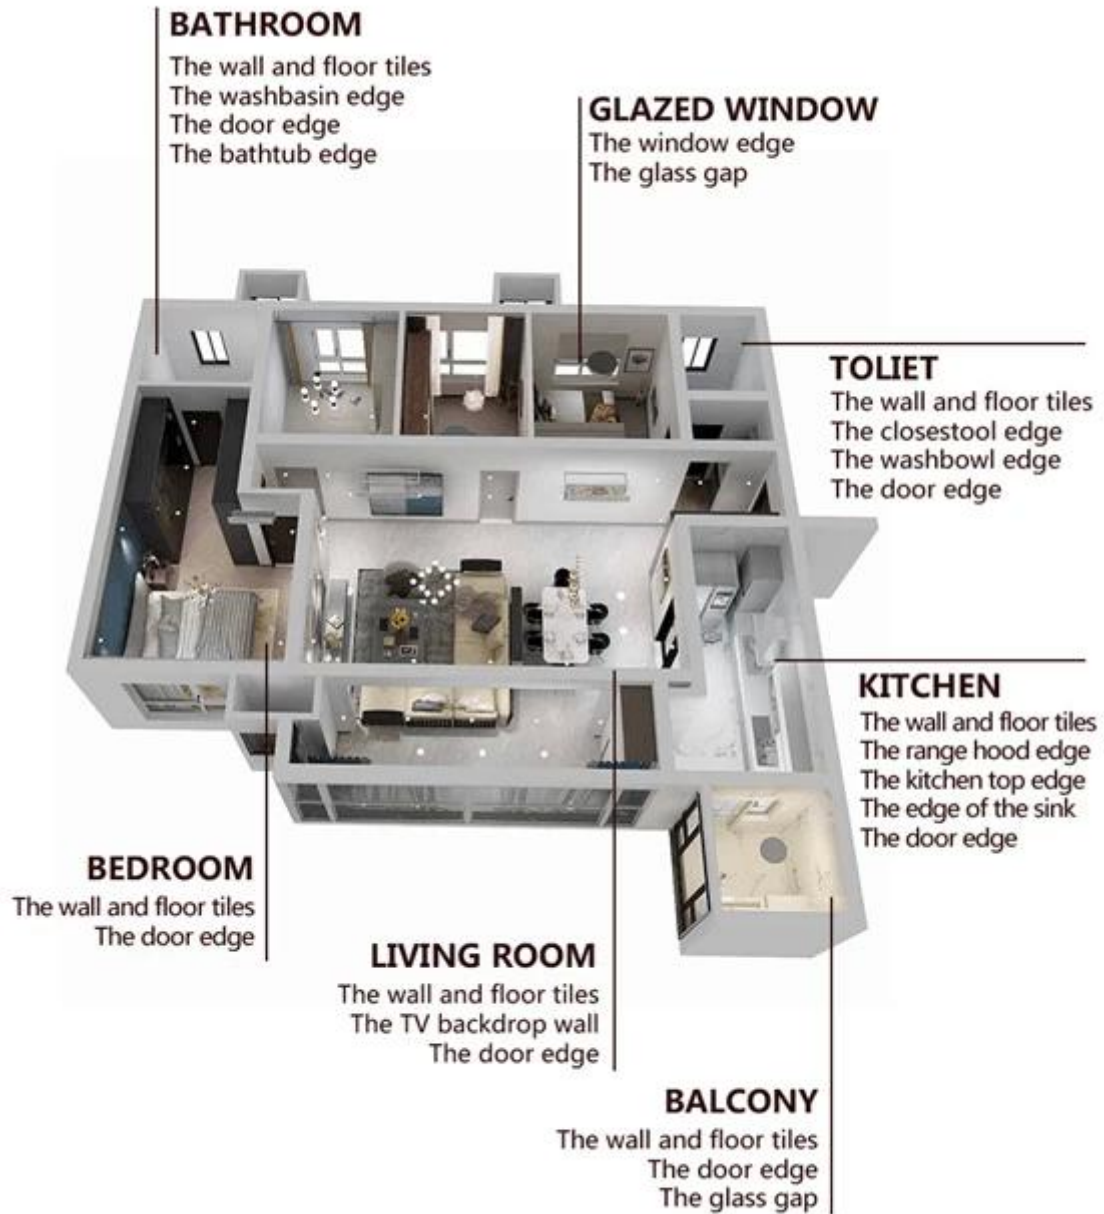



Clean the tiles and keep it dry



Polish with tile wax except the glazed tile



Open & Watch, both sides can extruded meanwhile



Screw on the nozzle, put on the grout gun



Inclined cut the top of the nozzle in 45°



Squeeze out 60-80cm long grout in the forefront



Evenly squeeze out the tile agent along the gap



Press the grout with professional glue-press tools



Don't touch in 4-5 hours and remove excess grout then.




Keep the tiles dry in 24 hours

□□□□□□□□□□□□□□□□□□□□□□



Two Component Caulking Gun



Cutter Knife

Pointing trowel

Brush

Forming Stick

Perching Knife

Masking Tape

Stainless Steel Ball

Cleaning Awl

□□□□□



□□□□□□□□□□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□□□□□□□

